

## MAGNET GRAPPLES




Magnet Grapples are used to clean out trailers, ground sweeping, load, unload and sort.

- > **Magnets** are designed for use with a deep field, aluminum wound grapple magnet.
- > **Internal Cabling** routed to eliminate exposure to snagging.
- > **280-Degree Power Rotation** for fast positioning. Optional knock around rotation.
- > **High Pressure Hydraulic Cylinders** have thick barrel walls, large ports and bolt-on heads for easier maintenance.
- > **Cylinder Shrouds** protects cylinder walls and reduces material packing.
- > **Weld-On Leg Tips** designed to be durable and replaceable.

Max Machine Weight	65,000 lbs.	130,000 lbs.			
Model	<b>LMG75C</b>	<b>LMG100C</b>	<b>LMG125C</b>	<b>LMG150C</b>	<b>LMG200C</b>
Capacity	3/4 cu yd	1 cu yd	1 1/4 cu yd	1 1/2 cu yd	2 cu yd
Tool Weight with Magnet	4200 lbs.	6200 lbs.	6400 lbs.	6600 lbs.	7000 lbs.
Magnet Diameter	30 in	40 in			
Max Opening	<b>A</b>	89 in	96 in	103 in	108 in
Open Overall Height	<b>B</b>	79 in	84 in	84 in	84 in
Closed Overall Height	<b>C</b>	100 in	105 in	108 in	111 in
Closed Overall Width	<b>D</b>	55 in	63 in	67 in	71 in
Spindle Pin Diameter	<b>E</b>	2 1/2 in	3 in		
Spindle Ear Width	<b>F</b>	6 in	8 1/4 in		
Open Width	<b>G</b>	70 in	71 in	77 in	80 in

Optional:

- > Knock-Around Rotation
- > Special Crossheads to fit OEM booms

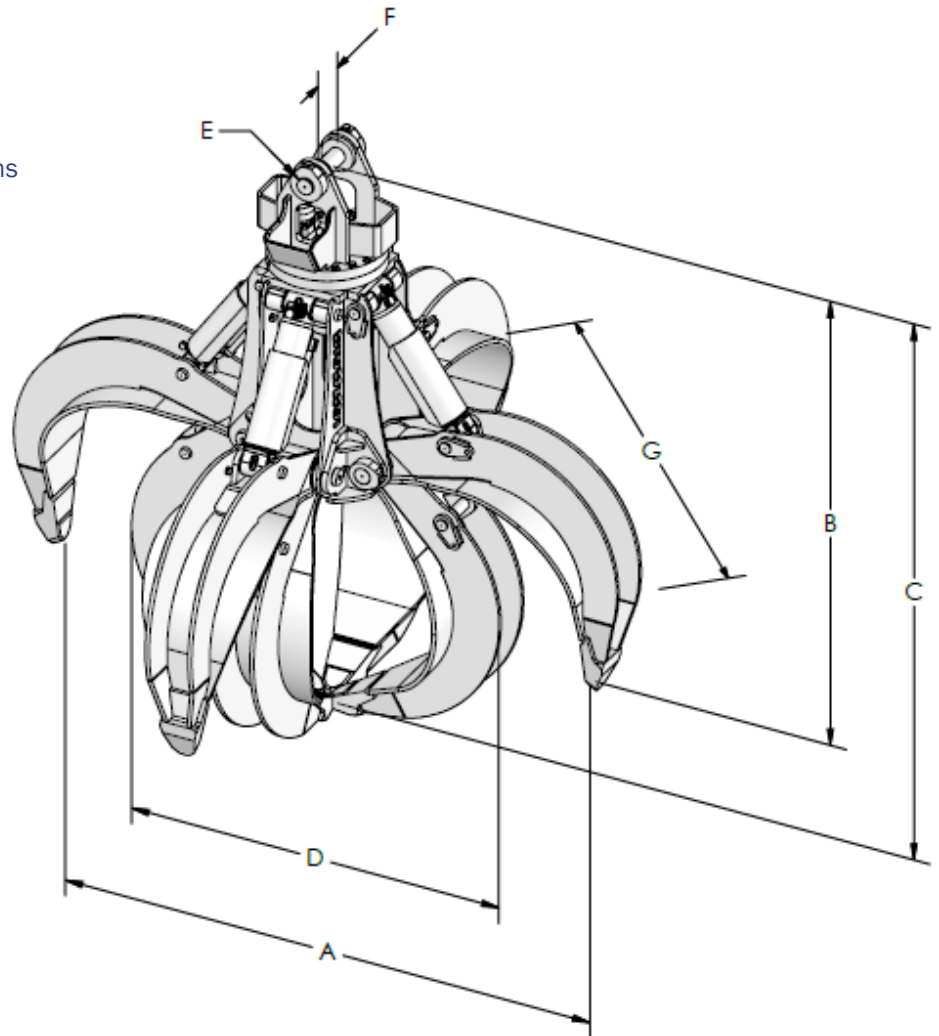

[www.youngcorp.com](http://www.youngcorp.com)

find us on [facebook](#)