

360-Degree Rotation

High torque, heavy duty, continuous 360-degree standard power rotation.

Tine Stops

Integrated stops protect cylinders from over extending.

High Pressure Rotary Union

Reduces back pressure and extends seal life.

Optional:

Tine Tip Reinforcement Kit
Tine Reinforcement Kit

High Pressure Hydraulic Cylinders

Features thick barrel walls, large ports and bolt-on cylinder heads for easier maintenance.

Cylinder Shrouds


Protects cylinder walls and reduces material packing.

Weld-On Leg Tips


Designed to be durable and replaceable.

PINS and BUSHINGS




Large diameter and heat treated steel for extended wear life.

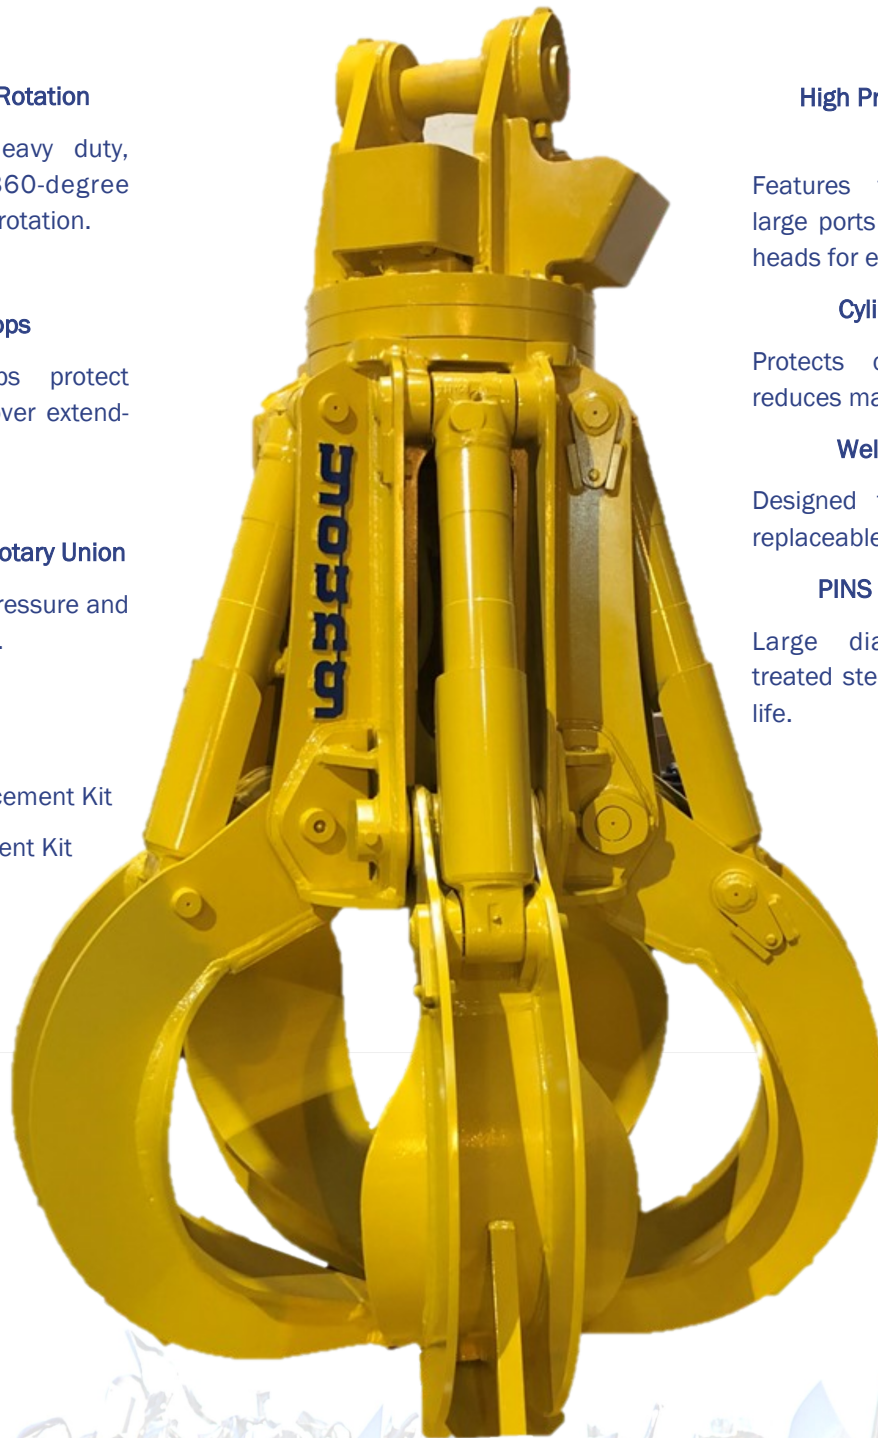

5-TINE ROTATING GRAPPLE

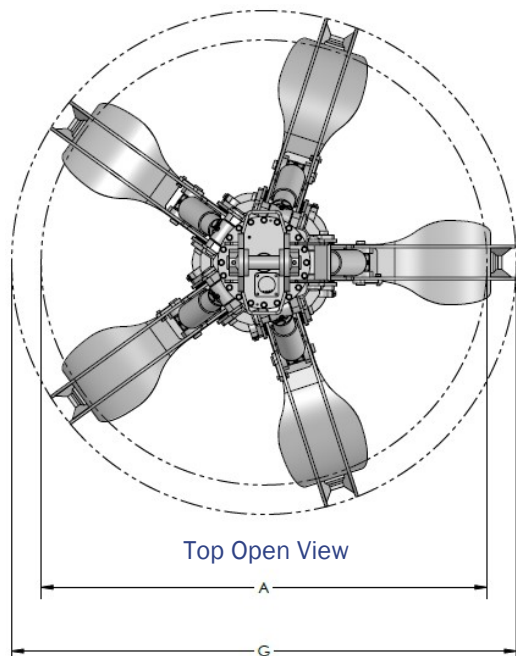

Model		L05-90D	L05-125D	L05-140D
Capacity (cubic yards)		0.90	1.25	1.40
Tool Weight (pounds)		4410	4620	5600
Max Opening (in)	A	88 3/4	98 3/4	102 1/4
Open Overall Height (in)	B	79 3/16	81 1/2	82 5/8
Closed Overall Height (in)	C	92 5/8	98 1/8	102 3/16
Closed Overall Width (in)	D	64 7/8	69 5/8	71 11/16
Spindle Pin Diameter (in)	E	3		
Spindle Ear Width (in)	F	6 7/8		
Overall Width Open (in)	G	101 1/2	111 3/4	115 1/2

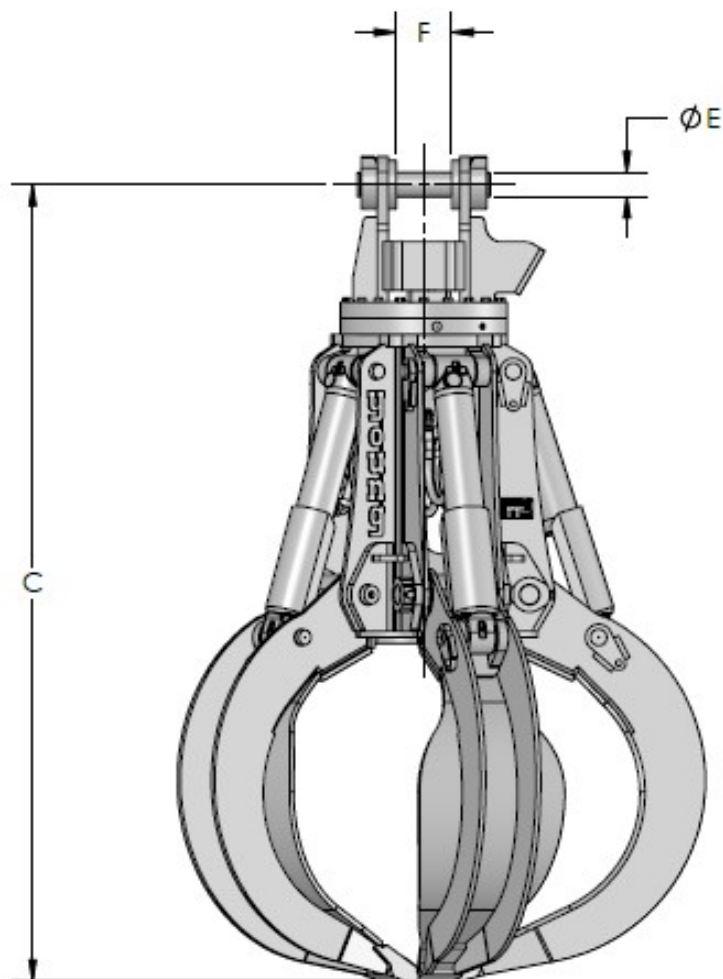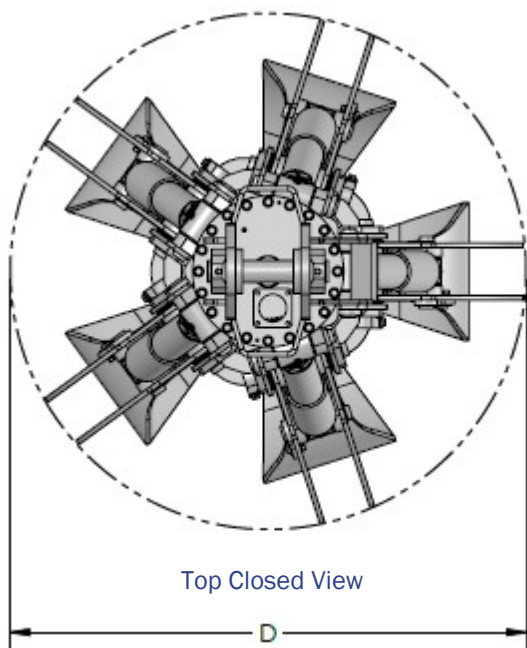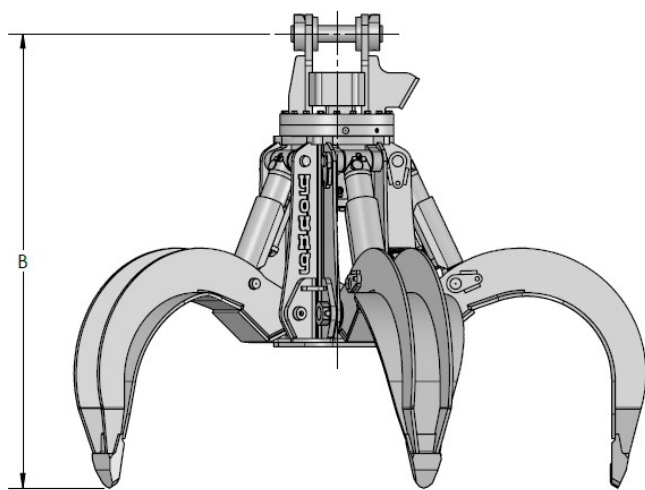

find us on [facebook](#)